

ProArt Display PA24ACRV



Key Features



Supporting QHD 2560 x 1440 resolution for crystal clear image quality



IPS technology is optimized for the finest image quality with 178° wide-viewing-angle



provides brighter imagery and supports the cinema-standard 95% DCI-P3 color gamut



Factory pre-calibrated to guarantee the ΔE color difference less than 2



USB Type-C Monitor

Full function USB-C connection for DisplayPort video, USB data transmission and supports 96W power delivery



Ambient Light Sensor

Ambient Light Sensor to synchronizes display brightness and color temperature with environment light changes



Daisy-chain

DisplayPort allows users to daisy chain up to 4 monitors for a multi-display workstation from one video source



USB Hub

Embedded four USB ports for connecting mouse, keyboard, or other USB devices

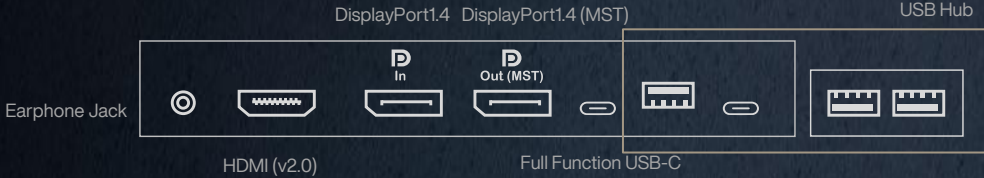


4-way Ergonomic Stand

Ergonomically-designed stand with tilt, swivel, pivot, and height adjustments

ProArt Display PA24ACRV

Spec Sheet

<p>Display</p>	<p>Panel Size (inch) : 23.8 (16:9) Pixels Per Inch (PPI) : 123 Display Viewing Area (H x V) : 526.84 x 296.35 mm Display Surface : Non-Glare Panel Type : IPS Viewing Angle (CR≥10, H/V) : 178° / 178° Pixel Pitch : 0.2058mm Resolution : 2560x1440 Color Space (sRGB) : 100% Color Space (DCI-P3) : 95% Brightness (HDR, Peak) : 400 cd/㎡ Brightness (Typ.) : 350cd/㎡ Contrast Ratio (Dynamic) : 3000:1 Contrast Ratio (Typ.) : 1000:1 Display Colors : 16.7M Response Time : 5ms (GTG) Refresh Rate (Max) : 75Hz HDR (High Dynamic Range) Support : HDR10 Flicker-free : Yes LCD ZBD Warranty : Yes (3 year)</p>
<p>Video Feature</p>	<p>ProArt Preset : Native / sRGB / Rec. 709 / DCI-P3 / Adobe RGB / Rec. 2020 / DICOM / HDR / User Mode 1 / User Mode 2 Color Temp. Selection : Yes (5 modes) Gamma Adjustment : Yes (Support Gamma 1.8 / 2.0 / 2.2 / 2.4 / 2.6) Color Accuracy : $\Delta E < 2$ ProArt Palette : Yes QuickFit Plus : Yes PIP / PBP Technology : Yes HDCP : Yes, 2.2 VRR Technology : Yes, Adaptive-Sync ProArt Chroma Tune : Yes DisplayWidget : Yes, DisplayWidget Center Low Blue Light : Yes</p>
<p>Audio Feature</p>	<p>Speaker : Yes (2Wx2)</p>
<p>IO ports</p>	<p>USB-C x 1 (DP Alt Mode) USB Hub : DisplayPort 1.4 x 2 (Daisy Chain) Yes (USB 3.2 Gen 1 Type-C; USB 3.2 Gen 1 Type-A x 3) HDMI(v2.0) x 1 Earphone Jack : Yes USB-C Power Delivery : 96W</p> 
<p>Signal Frequency</p>	<p>Digital Signal Frequency : 15~135 KHz (H) / 48~75 Hz (V)</p>
<p>Power Consumption</p>	<p>Power On (Typical): <14W* Power Saving Mode : <0.5W ; Power Off Mode : 0W (Hard Switch) 100-240V, 50/60Hz</p>
<p>Mechanical Design</p>	<p>Tilt : Yes (+23° ~ -5°) Swivel : Yes (+30° ~ -30°) Pivot : 90° (Clockwise & Anticlockwise) Ambient Light Sensor : Yes</p> <p>Height Adjustment : 0~130mm VESA Wall Mounting : 100x100mm Kensington Lock : Yes</p>
<p>Dimensions (Est.)</p>	<p>Phys. Dimension (W x H x D) : 53.96 x 51.51 x 19.72 cm (21.24" x 20.28" x 7.76") Phys. Dimension without Stand (W x H x D) : 53.96 x 32.22 x 4.46 cm (21.24" x 12.69" x 1.76") Box Dimension (W x H x D) : 62.00 x 39.00 x 12.70 cm (24.41" x 15.35" x 5.00")</p>
<p>Weight (Est.)</p>	<p>Net Weight with Stand : 5.6 Kg (12.35 lbs) Net Weight without Stand : 3.9 Kg (8.60 lbs) Gross Weight : 8.1 Kg (17.86 lbs)</p>
<p>Accessories</p>	<p>Power cord, USB-C cable (optional), HDMI cable (optional), DisplayPort cable (optional), Calibration Report, Quick Start Guide, Warranty Card, Welcome Card</p>
<p>Compliance Standard</p>	<p>FCC, UL/cUL, ICES-3, CB, CE, ErP, WEEE, TUV-GS, ISO 9241-307, UkrSEPRO., CU, BSMI, RCM, AU MEPS, VCCI, PSE, PC Recycle, J-MOSS, KC, KCC, SDoC, KMEPS, PSB, VN MEPS, Energy Star®, TCO, RoHs, CEC, WHQL Windows 10/11, Halogen Free, EPEAT Gold, TÜV Flicker Free, TÜV Low Blue Light, VESA DisplayHDR 400, VESA MediaSync Display, Calman Verified, Mac compliance</p>

*Power consumption is measured with screen brightness of 200 nits without audio / USB / or other peripheral connections drawing power.

**All specifications are subject to change without notice